

Loops In Python: Part 1


In this section of notes you will learn how to rerun parts of your program without duplicating instructions.

James Tam

Repetition: Computer View

- Continuing a process as long as a certain condition has been met.


Ask for age as long as the answer is negative (outside allowable range)

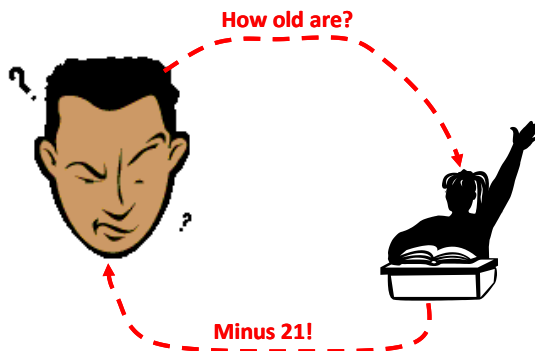

James Tam

Looping/Repetition

- How to get the program or portions of the program to automatically re-run
 - Without duplicating the instructions
 - Example: you need to calculate tax for multiple people

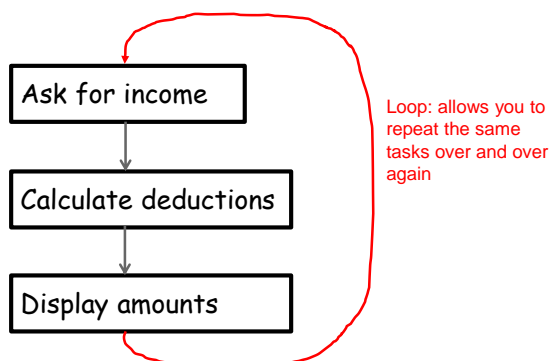

James Tam

How To Determine If Loops Can Be Applied


- Something needs to occur multiple times (generally it will repeat itself as long as it's true some condition has been met).

• Example 1:



Re-running the entire program

Flowchart

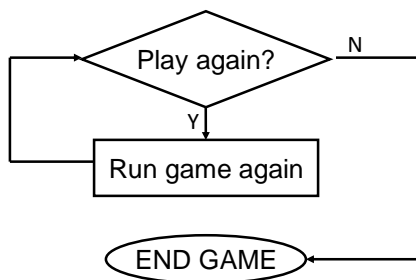

Code like format

```
While the player wants to play  
Run the game again
```

James Tam


How To Determine If Loops Can Be Applied (2)

•Example 2:

```
Enter your age (must be non-negative): -1
Enter your age (must be non-negative): 37
Enter your height (must be non-negative):
```

Re-running specific parts of the program

Flowchart

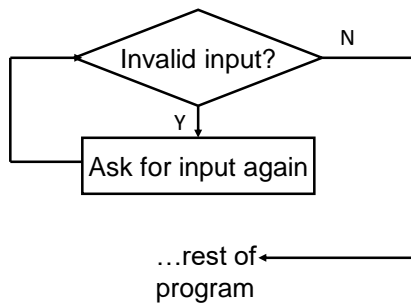

Code like format

```
While input is invalid
  Prompt user for input
```

James Tam

Basic Structure Of Loops

Whether or not a part of a program repeats is determined by a loop control (typically the control is just a variable).

- Initialize the control to the starting value
- Executing the body of the loop (the part to be repeated)
- Update the value of the control

- Somewhere ('top' of the loop): Testing the control against a stopping condition (Boolean expression)
 - Without this test the loop will never end (endless loop)


James Tam

Pre-Test Loops

Pre-test loops

- Check the stopping condition *before* executing the body of the loop.
- The loop executes *zero or more* times.

1. Initialize loop control
2. **Check if the repeating condition has been met**
 - a. If it's been met then go to Step 3
 - b. If it hasn't been met then the loop ends
3. Execute the body of the loop (the part to be repeated)
4. Update the loop control
5. Go to step 2

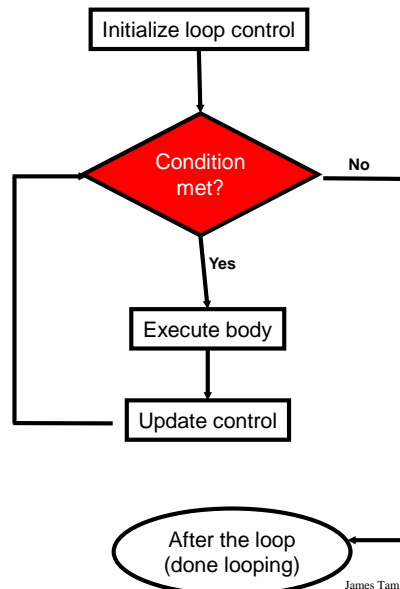

James Tam

Loops In Python

•for

- **Python:** can be used when the program can step through 'iterate' through a sequence.
 - E.g. 1: count through a numerical sequence (1, 2, 3...)
 - E.g. 2: the sequence of characters in a string
 - E.g. 3: the sequence of lines in a file.
- **Most other languages:** for-loops can only count through a numerical sequence (1, 2, 3...). Often reference to as "counting loops".

•While

- The most flexible (powerful) type of loop.
- It can be used almost any time repetition is needed.
 - Situations when it can't be used won't come up in this class (when recursion is needed).

James Tam

The While Loop

- This type of loop can be used if it's **not known** in advance how many times that the loop will repeat (most powerful type of loop, any other type of loop can be simulated with a while loop).
 - It can repeat so long as some arbitrary condition Boolean condition is true.

- **Format:**

(Simple condition)

```
while (Boolean expression):  
    body
```

(Compound condition)

```
while ((Boolean expression) Boolean operator (Boolean expression)):  
    body
```

James Tam

The While Loop (2)

- **Program name:** 1while1.py

- **Learning objective:** a simple counting loop stepping through a sequence (1 - 3)

```
i = 1  
while (i <= 3):  
    print("i =", i)  
    i = i + 1  
print("Done!")
```

The diagram illustrates the execution flow of the provided Python code. Red arrows point from numbered boxes to specific lines of code:

- 1) Initialize control** points to the line `i = 1`.
- 2) Check condition** points to the line `while (i <= 3):`.
- 3) Execute body** points to the block of code `print("i =", i)` and `i = i + 1`, which are grouped by a red curly brace.
- 4) Update control** points to the line `print("Done!")`.

James Tam

The while Loop (2)

- **Program name:** 1while1_counting_up.py
- **Learning objective:** a simple counting loop stepping through a sequence (1 - 3)

```
i = 1
while (i <= 3):
    print("i =", i)
    i = i + 1
print("Done!")
```

James Tam

Countdown Loop

- **Program name:** 2while2_counting_down.py
- **Learning objective:** a simple counting loop stepping down through a sequence (3 - 1)

```
i = 3
while (i >= 1):
    print("i =", i)
    i = i - 1
print("Done!")
```

James Tam

Common Mistakes: While Loops

- Forgetting to include the basic parts of a loop.

- Updating the control

```
i = 1
while(i <= 4):
    print("i =", i)
    # i = i + 1
```




```
i =
i =
i =
i =
i =
i =
i =
i =
i =
i =
```

James Tam

Practice Exercise #1

- The following program that prompts for and displays the user's age.
- Modifications:
 - As long as the user enters a negative age the program will continue prompting for age.
 - After a valid age has been entered then stop the prompts and display the age.

```
age = int(input("Age: "))
print(age)
```

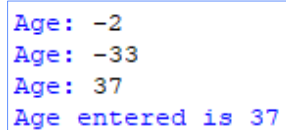

```
Age: -2
Age: -33
Age: 37
Age entered is 37
```

James Tam

The For Loop

- In Python a for-loop is used to step through a sequence e.g., count through a series of numbers or step through the lines in a file.

- **Syntax:**

```
for <name of loop control> in <something that can be iterated>:  
    body
```

- **Program name:** 3for1_counting_up.py

- Learning objective: a simple for counting loop stepping through a sequence (1 - 3)

```
for i in range (1, 4, 1):  
    print("i=", i)  
print("Done!")
```

1) Initialize control

2) Check condition

3) Execute body

4) Update control

James Tam

Counting Down With A For Loop

- **Program name:** 4for2_counting_down.py

- Learning objective: a simple counting loop stepping down through a sequence (3 - 1)

```
for i in range (3, 0, -1):  
    print("i = ", i)  
print("Done!")
```

James Tam

For Loop: Stepping Through A Sequence Of Characters

- Recall: A for-loop in Python can step through any iterable sequence (number sequence, characters in a string, lines in a file).

- **Program name:** 5for3_iterating_string.py

- Learning objective: a for loop stepping through a sequence in a string

```
We are taking the dog for a '
```

```
activity = input("What are you doing with dog now: ")  
print("We are taking the dog for a '", end="")
```

```
b-a-t-h-'
```

```
for ch in activity:  
    print(ch + "-", end="")  
print("")
```

James Tam

Erroneous For Loops (If There Is Time)

- The logic of the loop is such that the end condition has already been reached with the start condition.

- **Program name:** 6for_error.py

- Learning objective: a loop that never executes

```
for i in range (5, 0, 1):  
    print("i = ",i)  
print("Done!")
```

```
[csc loops 18 ]> python for_error.py  
Done!
```

James Tam

Loop Increments Need **Not Be Limited To One**

- **While:** 7while_increment_not_one.py

```
i = 0
while (i <= 100):
    print("i =", i)
    i = i + 5
print("Done!")
```

```
i = 0
i = 5
i = 10
i = 15
i = 20
i = 25
i = 30
i = 35
i = 40
i = 45
i = 50
i = 55
i = 60
i = 65
i = 70
i = 75
i = 80
i = 85
i = 90
i = 95
i = 100
Done!
```

- **For:** 8for_increment5.py

```
for i in range (0, 105, 5):
    print("i =", i)
print("Done!")
```

James Tam

Sentinel Controlled Loops

- The stopping condition for the loop occurs when the 'sentinel' value is reached e.g. sentinel: number less than zero (negative)

- **Program name:** 9sentinel_sum.py

- Learning objective: loops that execute until the sentinel value has been encountered.

```
total = 0
temp = 0
while(temp >= 0):
    temp = input ("Enter a non-negative integer (negative to end
sequence): ")
    temp = int(temp)
    if (temp >= 0):
        total = total + temp
print("Sum total of the series:", total)
```

```
Enter a positive integer (negative to end series):1
Enter a positive integer (negative to end series):2
Enter a positive integer (negative to end series):3
Enter a positive integer (negative to end series):-1
Sum total of the series: 6
```

Q: What if the user just entered a single negative number?

James Tam

Sentinel Controlled Loops (2)

- Sentinel controlled loops are frequently used in conjunction with the error checking of input.

- **Example** (sentinel value is one of the valid menu selections, repeat while selection is not one of these selections):

```
10 sentinel_controlled_menu.py
```

```
selection = " "  
while selection not in ("a", "A", "r", "R", "m", "M", "q", "Q"):  
    print("Menu options")  
    print("(a)dd a new player to the game")  
    print("(r)emove a player from the game")  
    print("(m)odify player")  
    print("(q)uit game")  
    selection = input("Enter your selection: ")  
if selection not in ("a", "A", "r", "R", "m", "M", "q", "Q"):  
    print("Please enter one of 'a', 'r', 'm' or 'q' ")
```

```
Menu options  
(a)dd a new player to the game  
(r)emove a player from the game  
(m)odify player  
(q)uit game  
Enter your selection: x  
Please enter one of 'a', 'r', 'm' or 'q'
```

```
Menu options  
(a)dd a new player to the game  
(r)emove a player from the game  
(m)odify player  
(q)uit game  
Enter your selection: A
```

Valid option
entered, loop ends

James Tam

Post Test Loops

- Python doesn't happen to implement them but they are common in other languages and they can be useful for certain situations.
 - Recall: this is not a "python programming" course but instead it's a course where you learn basic programming principles (e.g. input, output, variables, constants, branching, loops etc.) without being limited by a particular language.
- When to use post loops: when you need a loop to always execute at least once (even if the Boolean expression evaluates to false the first time that the loop is encountered).
- The guaranteed execution of 1+ times occurs because the Boolean expression is checked after the body executes.

James Tam

Comparison Of Loop Types

- Pre-test loops (for, while):

- Evaluates the Boolean expression before executing the body.
- Executes zero or more times.

- E.g.

```
age = 12
while (age < 0):
```

- Structure:**

```
while (BE):
    Body
```

- Post-test loops (nothing in python C, C++, Java has the do-while loop)

- Evaluates the Boolean expression after executing the body.
- Guaranteed to execute at least once.
- Execute one or more times.

- Structure:**

```
do:
    Body
while (BE):
```

James Tam

Examples Pre Vs. Post Test Loops (Java - For Illustration Only)

- Pre-test

```
age = 0;
System.out.print("Pre-test");
while (age < 0) {
    System.out.print("Age: ");
    age = userInput.nextInt();
}
System.out.println("You typed in " + age);
```

```
Pre-test loop never runs because the BE is false
You typed in 0
```

- Post-test

```
age = 0;
System.out.print("Post-test");
do {
    System.out.print("Age: ");
    age = userInput.nextInt();
} while (age < 0);
System.out.println("You typed in " + age);
```

```
Post-test loop guaranteed to run even when the BE is false
Type in your age as a whole number: -1
Type in your age as a whole number: 37
You typed in 37
```

James Tam

'Simulating' A Post-Test Loop Using A While-Loop

- **'Prime' the loop control.**

- Set the variable(s) to a starting value(s) to guarantee execution at the start.

- **Program name:** 11guaranteed_pre_test_execution.py

```
age = -1
while (age < 0):
    print("Type in your age as a whole number: ", end = "")
    age = int(input())
print("You typed in %d" %age);
```

James Tam

Recap: What Looping Constructs Are Available In Python/When To Use Them

Construct	When To Use
Pre-test loops	You want the stopping condition to be checked before the loop body is executed (typically used when you want a loop to execute zero or more times).
• While	• The most powerful looping construct: you can write a 'while' loop to mimic the behavior of any other type of loop. In general it should be used when you want a pre-test loop which can be used for most any arbitrary stopping condition e.g., execute the loop as long as the user doesn't enter a negative number.
• For	• In Python it can be used to step through some sequence
Post-test: None in Python	You want to execute the body of the loop before checking the stopping condition (typically used to ensure that the body of the loop will execute at least once). The logic can be simulated with a while loop.

James Tam

After This Section You Should Now Know

- When and why are loops used in computer programs
- What is the difference between pre-test loops and post-test loops
- How to trace the execution of pre-test loops
- How to properly write the code for a loop in a program
- What is a sentinel controlled loop and when should they be employed

James Tam

Copyright Notification

- “Unless otherwise indicated, all images in this presentation are used with permission from Microsoft.”

slide 28

James Tam